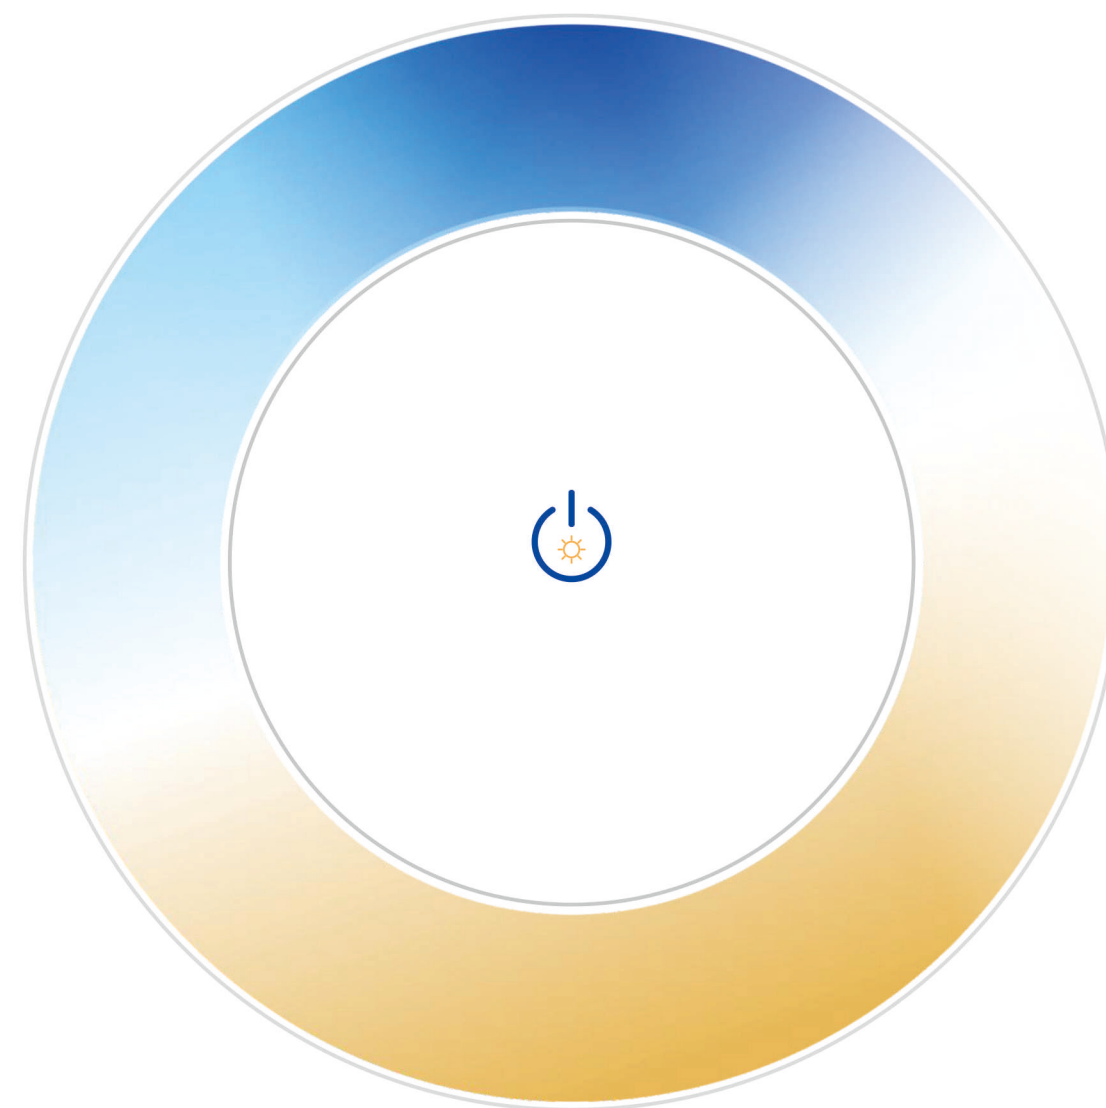


www.iskydance.com

GUANGZHOU SKYDANCE CO.,LTD

Tel: +86 20 39909740

Email: sales@iskydance.com

Add: No.19, Chuangyuan Road, Zhongcun Street,
Panyu District,Guangzhou, China

2025-2026
PRODUCT CATALOG

Sensor

Sensor Series

Sensor Series

SKYDANCE sensor series include PIR Motion Sensor, microwave sensor, touch sensor, hand sweep sensor, and door sensor system. They are widely used in cabinets, ceilings, stairs, and doors. Light threshold, time delay, and standby time etc. function can be set. Products include sensor dimmers, sensor switches, stair light controllers, RF & 0/1-10V sensor dimmers, cabinet LED driver and a variety of sensor probes etc..Providing a complete sensor lighting control solution.



PIR Motion Sensor



Microwave Induction



Light Threshold




Dimming



On/Off




Warranty 5 years



1. With sufficient ambient light, the sensor does not turn on the light.



2. With insufficient ambient light, the sensor turns on the light when motion is detected.




3. After hold time, the light turns off if no motion detected.



4. After elapse of stand-by time, the sensor turns off the light if no motion detected.




Wall mounting pattern(Unit:m)
Suggested installation height: 1-1.8m



Wall mounting pattern(Unit:m)
Suggested installation height: 2.5-15m

DC input

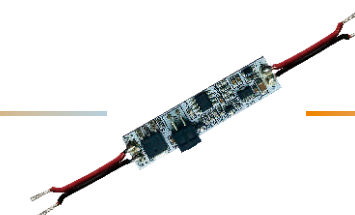

PIR Motion Sensor Switch



LED

AC input



Cabinet LED drivers



Sensor control
(Optional)



Control boxes
(Optional)



LED



Remote Control

► Mini Sensor Switch & Dimmer

- > Apply to table, cabinet, wardrobe led lights control,etc.
- > Touch/Hand sweep/door/PIR sensor various trigger ways
- > Efficiency and high sensitivity
- > Easy installation



Model No.	E1-C	E1-B	E1-G	E2-B	E1-D	E1-R
Product Name	Touch sensor dimmer	Hand sweep sensor switch	Hand sweep sensor switch	CCT Hand Sweep dimmer	Door sensor switch	PIR motion sensor switch
Input Voltage	12-24VDC	12-24VDC	5-24VDC	12-24VDC	12-24VDC	12-24VDC
Output Voltage	12-24VDC	12-24VDC	5-24VDC	12-24VDC	12-24VDC	12-24VDC
Output Current	Max 3A	Max 4A	Max 4A	Max 3A	Max 4A	Max 3A
Output Power	12V<36W, 24V<72W	12V<48W, 24V<96W	5V<20W, 12V<48W, 24V<96W	12V<36W, 24V<72W	12V<48W, 24V<96W	12V<36W, 24V<72W
Size (mm)	50 X 7.8 X 10	50 X 11 X 9	55 X 8 X 4.5	50 X 10 X 5.3	50 X 11 X 7.5	50 X 11 X 12

- > Daylight detection function
- > 2 light off modes, 4 level timer, 5 level brightness
- > Support linkage induction light switch function
- > Two light off modes are available
- > E1-RS can match with RF 2.4G remote control
- > Suitable for staircase, bedroom, living room, closet, aisle, and other light sensor switch control



Model No.	Input Voltage	Output Voltage	Output Current	Output Power
E1-RS	12-48VDC	12-48VDC	6A(12-24V);4A(36-48V)	12V<72W,24V<144W, 36V<144W,48V<192W
E1-RC	12-48VDC	12-48VDC	6A(12-24V);4A(36-48V)	12V<72W,24V<144W, 36V<144W,48V<192W

- > Constant voltage output, connect with low voltage LED strip
- > Dupont male jack in, dupont female jack out

- > Bilateral snap design for easy installation



Model No.	Input Voltage	Output Voltage	Output Current	Output Power
ER-AV	5-24VDC	5-24VDC	Max 3A	5V<15W,12V<36W,24V<72W
EC-AV	5-24VDC	5-24VDC	Max 2.5A	5V<12.5W,12V<30W,24V<60W

- > 1/2/3 touch button constant voltage CCT/ RGB LED controller
- > 3M paste in the bottom of the PCBA make easy installation and security
- > The media on the touch spring can be PC cover, acrylic board or mirror glass
- > Reverse protection
- > Widely used in table lamps, bedroom lamps, wardrobe lights, etc



- For CCT
- Turn on/off the light, adjust brightness or color temperature via buttons

- For RGB
- Turn on/off the light, adjust brightness or color temperature via buttons
- 2 second on/off light fade

Model No.	E2-C1 / E2-C2 / E2-C3	Model No.	E3-C1 / E3-C2 / E3-C3
Input Voltage	5-24VDC	Input Voltage	5-24VDC
Output Voltage	5-24VDC	Output Voltage	5-24VDC
Output Current	2A/CH	Output Current	1.5A/CH
Output Power	5V<10W,12V<24W,24V<48W	Output Power	5V<7.5W,12V<18W,24V<36W

► 32CH PIR Motion Sensor Stair Light Controller

- 32 Channel
- 4 lighting modes settable
- 1-8 level light speed and brightness adjustable
- Work with cv single color and RGB SPI Pixel led strips
- PIR motion sensor or push switch signal input
- Come with 2 PIR sensor,1 daylight sensor and 2 extension lines
- 2 stair light controllers can cascade



Model No.	Input Voltage	Output Voltage	Output Current	Output Power
ES32	5-24VDC	32 x (5-24)VDC	32CH*1A	5V<160W 12V<384W; 24V<768W

- 32 Channel
- 6 run modes are available: flow, chase, trail, float, five-step and one-step
- 1-8 level light speed and brightness adjustable
- Only for cv single color LED strip
- PIR motion sensor or push switch signal input
- With fast self-testing function



Model No.	Input Voltage	Output Voltage	Output Current	Output Power
ES32-V	5-24VDC	32 x (5-24)VDC	32CH*1A	5V<160W 12V<384W; 24V<768W


► 24CH PIR Motion Sensor Stair Light Controller

- 24 Channel
- Work with single color and RGB SPI Pixel led strips
- White light step must be used with ES-F step sub-controller,defaults 24 steps, can be set up to 72 steps
- 2 lighting modes settable
- 1-8 level light speed and brightness adjustable
- 2 groups different SPI(TTL) signal output




		186 X 68 X 25.5MM				65 X 40 X 8MM	
Model No.	ES24	Model No.	ES-F (step sub-controller)				
Input Voltage	5-24VDC	Input Voltage	5-24VDC				
Output Voltage	/	Output Voltage	5-24VDC				
Output Current	24CH*1A	Output Current	Max1A				
Output Power	5V<100W 12V<240W; 24V<480W	Output Power	/				

Application

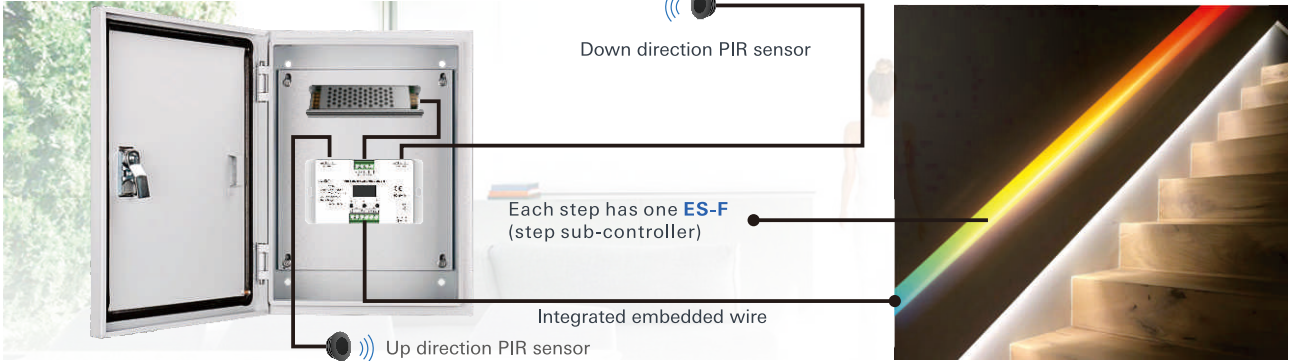

► Dual PIR Sensor + Dual Push Button SPI Controller

- 4 lighting modes selectable
- Work with RGB or white light SPI Pixel led strips, Max 960 Pixel number
- Can drive 28 kinds IC digital RGB or white LED strip, IC type and R/G/B order can be set
- One push switch connect with multiple controllers for sequential switching control
- Multiple light colors and change types are selectable
- 1-8 level light speed and 1-10 level brightness adjustable
- Easy operation with 3 buttons
- Work with RF 2.4G remote control

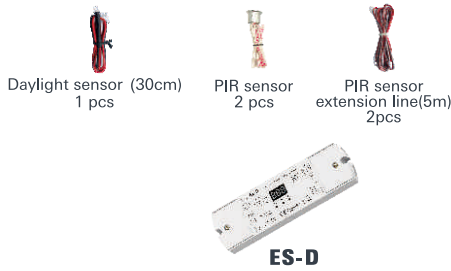

- * Tuya APP cloud control, Voice control
- * 4 APP painted segment color mixing selectable
- * APP custom rich dynamic effects selectable
- * 3 APP music rhythms



Model No.	Input Voltage	Output Signal	Pixel Number	Input Signal	Size (mm)
ES-D	5-24VDC	2 X SPI(TTL)	Max 960	PIR sensor + Push button + RF 2.4GHz	170 X 50 X 23
ES-D(WT)	5-24VDC	2 X SPI(TTL)	Max 960	PIR sensor + Push button + Tuya APP + RF 2.4GHz	170 X 50 X 23

► Dual Sensing 2CH LED Controller

- Use for single color or color temperature low voltage LED strip or other low voltage powered devices
- Compatible with a variety of sensing probes
- Connected to external self-reset switch
- DIP switch to set light type, daylight detection switch, delay light off time
- Can be applied to staircase light control, bedroom, living room, cabinet, wardrobe and other light control



- * DIP switch to set light type, daylight detection switch, delay light off time

Model No.	Input Voltage	Output Voltage	Output Current	Output Power
ES-V	12-48VDC	2*(12-48)VDC	2CH*6A@12/24V; 2CH*4A@36/48V	12V<144W; 24V<288W; 36V<288W; 48V<384W

► Microwave Motion Sensor Dimming Controller



- Control lights by sensing human or object movement
- Sensing distance, hold time, standby time, daylight detection threshold, light type can be set via 10-bit DIP switch
- Support 3 induction control modes: on/off, two-stage dimming, three-stage dimming
- Support 3 kinds of light sensor switch control: single color, color temperature, RGB color light
- Light brightness, color temperature or color can be adjusted by pressing a button or remote control
- Can be used as a remote control

Model No.	Input Voltage	Output Current	Output Power	Input signal	Size (mm)
V3-PM	12-24VDC	3CH, 2A/CH	3x(24-48)W	Microwave, RF 2.4GHz	83.5 X 32.5 X 19.3

► Microwave Human Presence Sensor Dimming Controller





- Determine the presence of the human body by detecting the accumulation of tiny movements such as human breathing
- Sensing distance, hold time, standby time, daylight detection threshold, light type can be set via 10-bit DIP switch
- Support 3 induction control modes: on/off, two-stage dimming, three-stage dimming
- Support 3 kinds of light sensor switch control: single color, color temperature, RGB color light
- Light brightness, color temperature or color can be adjusted by pressing a button or remote control
- Can be used as a remote control

Model No.	Input Voltage	Output Current	Output Power	Input signal	Size (mm)
V3-PM	12-24VDC	3CH, 2A/CH	3x(24-48)W	Microwave, RF 2.4GHz	83.5 X 32.5 X 19.3

► PIR Motion Sensor Dimming Controller

- With daylight detection function
- 3 button operation, 6 indicator lights
- With 3 work modes, 5 level dimmer, 6 level timer function
- RF 2.4G single-zone or multi-zone dimming remote control optional
- 3M tape installation, easy and convenient
- Suitable for kitchen, cabinets, stairs, bedrooms, closets, living rooms, aisles and so on

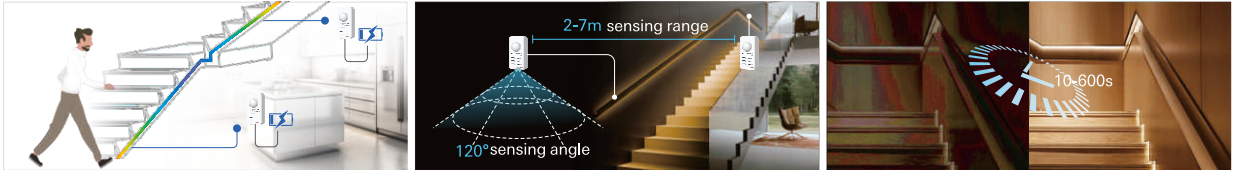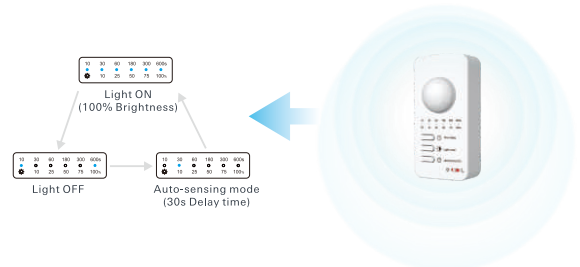

Two sensor dimming controller must not be connected together to control the same LED strip

Within sensing range light on

Sensor delay off time 10-600s optional

Model No.	Input Voltage	Output Voltage	Output Current	Output Power	Size (mm)
EV-R	5-24VDC	5-24VDC	1CH*3A	5V<15W, 12V<36W, 24V<72W	80 X 40 X 29

Sensor Series



- RF RGB/CCT/DIM 3-in-1 PIR motion sensor LED controller with daylight detection
- Built in 15 static and 5 dynamic modes, including jump or gradual change style
- Two light off methods are available,the light goes out or stays low when the person leaves



- WiFi & RF RGB/CCT/DIM 3-in-1 PIR motion sensor LED controller with daylight detection
- Built in 15 static and 5 dynamic modes, including jump or gradual change style
- Two light off methods are available,the light goes out or stays low when the person leaves
- Tuya APP cloud control, voice control,support on/off, RGB color, color temperature and brightness adjustment, timer run, scene edit and music play function

Model No.	Input Voltage	Output Voltage	Output Current	Output Power	Size (mm)
E3-R	5-24VDC	5-24VDC	3CH*1.5A	5V<22.5W, 12V<54W, 24v<108W	80 X 40 X 29
E3-R(WT)	5-24VDC	5-24VDC	3CH*1.5A	5V<22.5W, 12V<54W, 24v<108W	80 X 40 X 29

► PIR/Microwave Motion Sensor Switch((RF/0-10V)




- Ceiling mounting installation
- High voltage AC input, High voltage AC relay output with zero-cross detection



- RF Signal, 0-10V or 1-10V output selectable
- Time delay and light threshold can be set via knob potentiometer

Model NO.	EH-R (PIR motion sensor switch)	EH-M (Microwave motion sensor switch)
Working voltage	100-240VAC	100-240VAC
Output signal	0/1-10V(Max.30mA), RF 2.4GHz	0/1-10V(Max.30mA), RF 2.4GHz
Output current	Max 4A (AC)	Max 4A (AC)
HF system	/	10.525GHz
Power consumption	<1.3W(Operation)	<1.6W(Operation)
Detection zone	Max.(DxH) 10 x 5m	Max.(DxH) 20 x 10m
Detection sensitivity	/	10%/25%/50%/75%/100%
Hold time	10s/30s/90s/3min/10min/30min/+∞	10s/30s/90s/3min/10min/30min/+∞
Stand-by time	0s/30s/90s/3min/10min/30min/+∞	0s/30s/90s/3min/10min/30min/+∞
Daylight threshold	10lux/30lux/50lux/100lux/150lux/200lux/Disable	10lux/30lux/50lux/100lux/150lux/200lux/Disable
Expected light	50lux/100lux/150lux/200lux/250lux/300lux/400lux	50lux/100lux/150lux/200lux/250lux/300lux/400lux
Mounting height	5m Max.	10m Max.
Motion detection	/	0.5-3m/s
Detection angle	360°(ceiling installation)	360°(ceiling installation)
Operation temperature	Ta:-20°C~+50°C	Ta:-20°C~+50°C


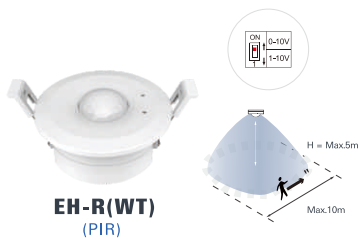


- Set the sensor sensitivity, hold time, stand-by time and light sensing threshold via APP
- Tuya smart APP cloud control, smart linkage to other Tuya devices

Model NO.	EH-R(WT) (PIR motion sensor switch)	Stand-by time	0s/30s/90s/3min/10min/30min/+∞
Working voltage	100-240VAC	Daylight threshold	10lux/30lux/50lux/100lux/150lux/200lux/Disable
Output signal	0/1-10V(Max.30mA), RF 2.4GHz	Expected light	/
Output current	Max 4A (AC)	Mounting height	5m Max
HF system	/	Motion detection	/
Power consumption	<1.8W(Operation)	Detection angle	120°(ceiling installation)
Detection zone	Max.(DxH) 10 x 5m	Operation temperature	Ta: -20°C ~ +50°C
Detection sensitivity	/	Size (mm)	Φ95 X 51
Hold time	10s/30s/90s/3min/10min/30min/+∞		

► Sensor DC LED Dimmer

- Connect with multiple Induction Head(PIR motion sensor, Touch sensor, Door sensor, Hand sweep sensor, Microwave motion detector,etc.)
- Plug-in installation
- Max 8A output current, max output power 384W@48V

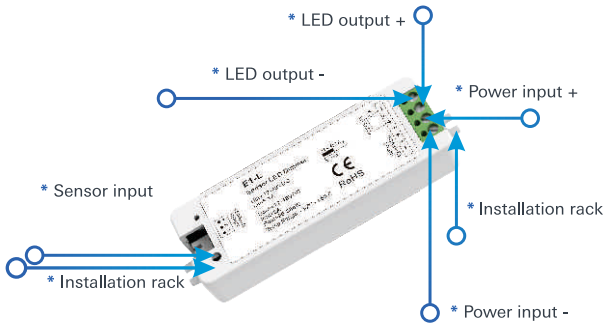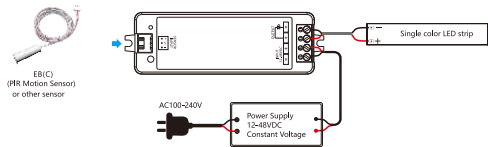

Model No.	Input Voltage	Output Voltage	Output Current	Input Signal	Size (mm)
E1-L	12-48VDC	12-48VDC	1CH*8A	12V<96W, 24V<192W 36V<288W, 48V<384W	97 X 33 X 18

► Sensor + RF DC LED Controller




- 3 channel constant voltage LED controller, output connect single color, CCT or RGB LED strips
- Compatible with multiple sensors, including PIR motion sensors, door contact sensors, hand sweep sensors, etc
- Two button operation, supporting control of on/off, brightness, color temperature, RGB colors, dynamic modes, and dynamic speed adjustment
- 9-level delay-off timer (3s, 5s, 10s, 30s, 1min, 3min, 10min, 30min, and Off)
- Work as RF remote, output RF 2.4G signal

Model No.	Input Voltage	Output voltage	Output Current	Output Power	Size (mm)
V3-E	12-24VDC	12-24VDC	3CH, 2A/CH	3x(24-48)W	83.5 X 32.5 X 19.3


Sensor Series

► Microwave Sensor RF Switch


- Active microwave motion detectors
- Built-in motion sensor and daylight sensor
- Output RF 2.4G signal
- Matched with RF LED controller or RF dimmable LED driver
- Detection area, time delay and daylight threshold can be set
- Wide detection area, range up to 20m in diameter
- Mounting height max.15m

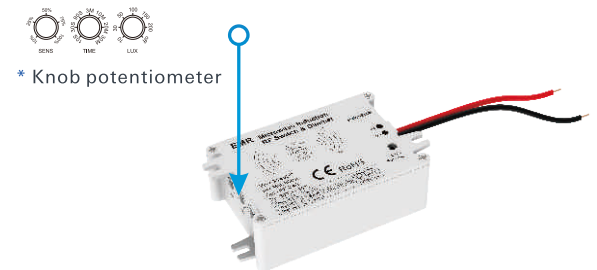

Microwave Sensor Detection Pattern

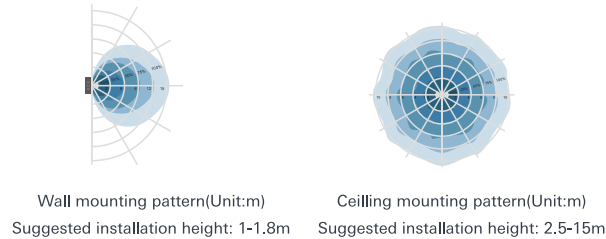


Sensor Distance

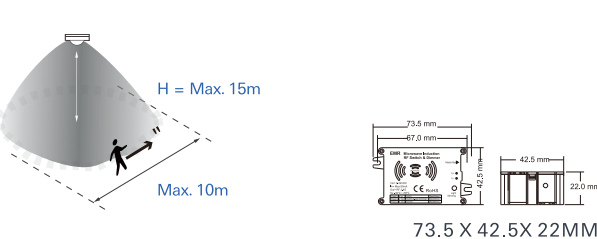

Model NO.	EMR	Mounting height	15m Max.
Working voltage	9-24VAC	Hold time	10s/30s/90s/3min/10min/20min/30min
Output signal	RF 2.4GHz	Stand-by time	10s/30s/90s/3min/10min/20min/30min
HF system	10.525GHz	Daylight threshold	10lux/30lux/50lux/100lux/150lux/200lux/Disable
Power consumption	<0.5W(Stanby), <1W(Operation)	Daylight expected	50lux/100lux/150lux/200lux/250lux/300lux/400lux
Detection zone	Max.(DxH) 20 x 15m	Motion detection	0.5-3m/s
Detection sensitivity	10%/25%/50%/75%/100%	Detection angle	150°(wall installation), 360°(ceilling installation)

► Cabinet LED Driver

- 90-264VAC Input
- Constant voltage output, connect with LED strip or Skydance synchronous LED Control box
- Built-in active PFC function: 0.95 Typ
- Ultra-thin design, light weight and high efficiency
- Over-load / Short circuit protection

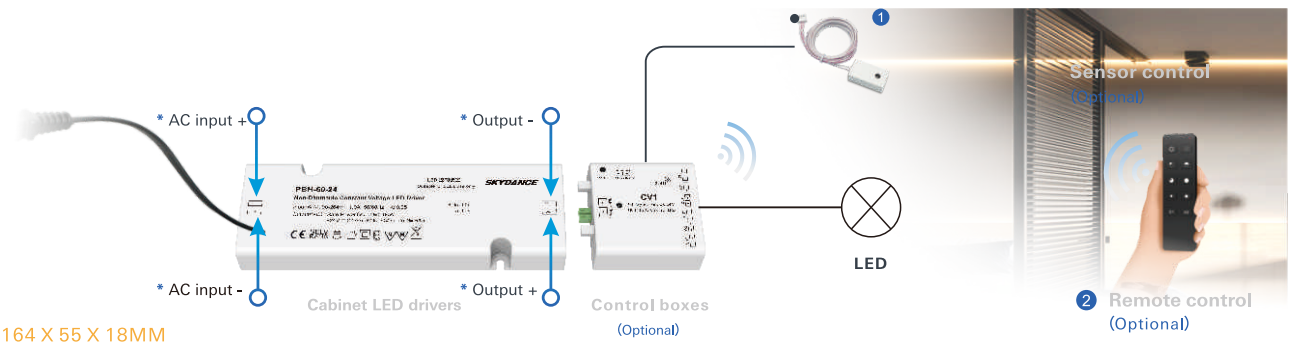

164 X 55 X 18MM

Model No.	Input Voltage	Output Voltage	Output Current	Output Power	Efficiency(TYP)	Power Factor
PBH-60-24(E)	24VDC	24VDC	Max. 2.5A	Max. 60W	85%	>0.98

► Synchronous LED Control Box

- Match with a variety of induction sensor head optional
- Light on/off fade time 0.5/3s selectable
- Ultra-thin design, light weight and high efficiency
- Suitable for indoor LED lighting application






Model No.	Input Voltage	Output Channel	Output Current	Input signal	Light Type	Size (mm)
CV0	12-24VDC	6CH	12V<60W; 24V<60W	Sensor	On/ Off	54 X 55 X 18
CV1	12-24VDC	6CH	12V<60W; 24V<60W	RF; Sensor	Dimming	54 X 55 X 18
CV2	12-24VDC	6CH	12V<60W; 24V<60W	RF; Sensor	CCT	54 X 55 X 18

- Dimming interface: Wi-Fi, RF Wireless and Sensor
- Tuya APP cloud control, Voice control
- 2.4G RF remote control
- Match with a variety of induction sensor head optional
- Light on/off fade time 3s selectable
- Ultra-thin design, light weight and high efficiency




Model No.	Input Voltage	Output Channel	Output Power	Bimimming interface	Light Type
CV1(WT)	12-24VDC	6CH	12V<60W; 24V<60W	RF Wireless, Sensor, WiFi	Dimming

► Sensor Probes

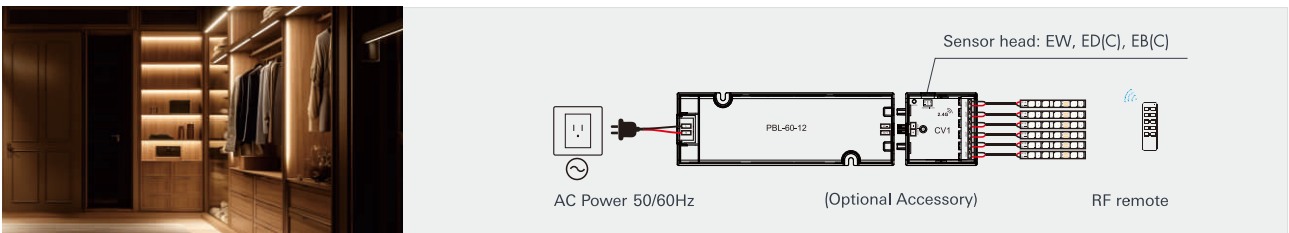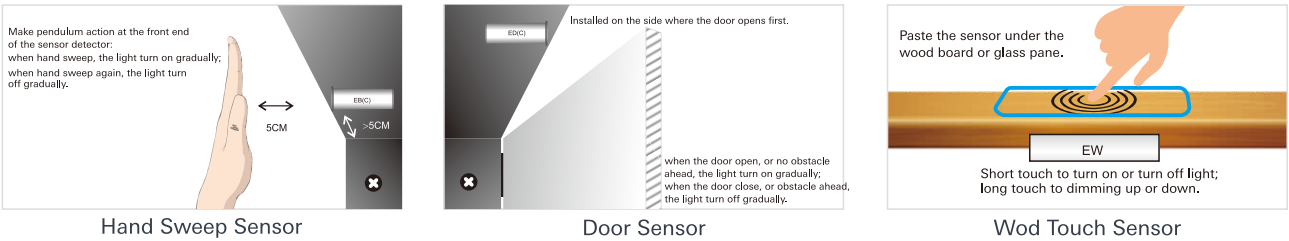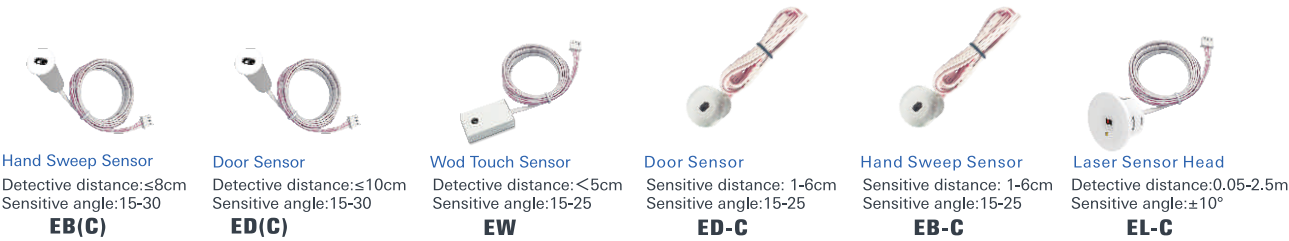


Sensor Series


Connect with a variety of induction Head




Door Sensor




ED(C)



Hand Sweep Sensor



EB(C)



Wood Touch Sensor



EW

Model No.	Sensor data	Size (mm)
EB (C)	Detective distance: 8cm, Detective angle: 15-30	32.3 X 13 wire: 1 meter
ED (C)	Detective distance: 10cm, Detective angle: 15-30	32.3 X 13 wire: 1 meter
EW	Dimming range: 0-100% 2KHz PWM Frequency, Detective distance: ≤5cm	33.5 X 19 X 10 wire: 1 meter
ED-C	Sensitive distance: 1-6cm, Sensitive angle: 15-25	26 X 20 X 18 wire: 1 meter
EB-C	Sensitive distance: 1-6cm, Sensitive angle: 15-25	26 X 20 X 18 wire: 1 meter
EL-C	Detective distance 0.05-2.5m, Sensitive angle ±10°	32*32*17.5, wire: 1.2 meter

► Hand Sweep / Door Sensor Switch

- Constant voltage output, connect with low voltage LED strip
- PWM : 2KHz
- 1 second on/off light fade
- Apply to cabinet, closet, wine cabinet and other lighting



Hand sweep sensor switch
DC female jack in
DC male jack out
Sensitive field: ≤7cm

EB-CV(D)



Hand sweep sensor switch
Dupont male jack in
Dupont female jack out
Sensitive field: ≤7cm

EB-CV(L)



Door sensor switch
DC female jack in
DC male jack out
Sensitive field: ≤5cm

ED-CV(D)



Door sensor switch
Dupont male jack in
Dupont female jack out
Sensitive field: ≤5cm

ED-CV(L)




Hand sweep sensor switch
Sensitive field: ≤8cm
Dimming range: 5-100%

EB-V(C)




Door sensor switch
Sensitive field: ≤6cm


ED-V(C)

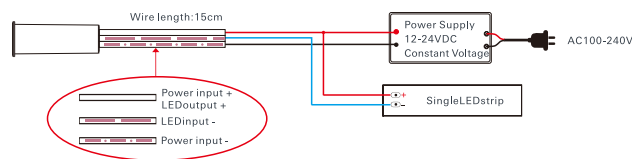

DC Plug Connection

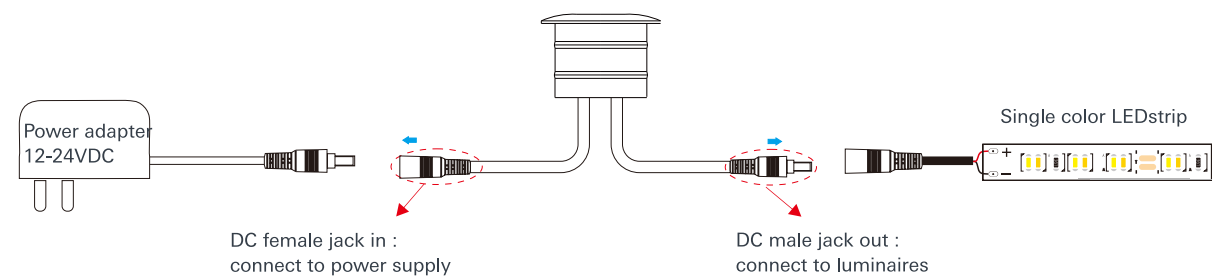

Dupont wire connection

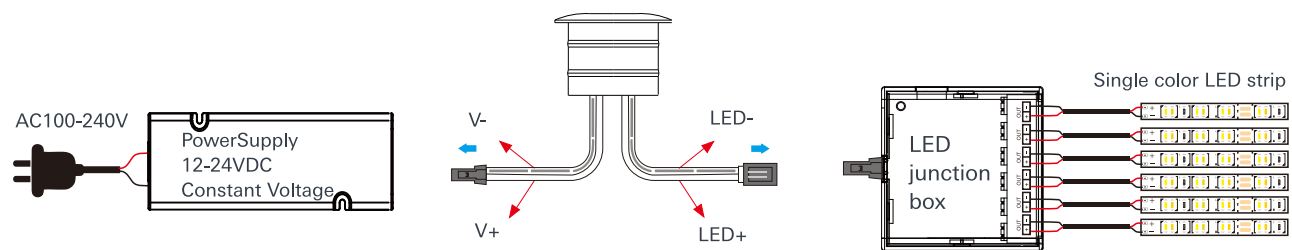

Model No.	Input Voltage	Output Voltage	Output Current	Output Power
EB-CV(D)	12-24VDC	12-24VDC	Max. 4A	48-96W
EB-CV(L)	12-24VDC	12-24VDC	Max. 4A	48-96W
ED-CV(D)	12-24VDC	12-24VDC	Max. 4A	48-96W
ED-CV(L)	12-24VDC	12-24VDC	Max. 4A	48-96W
EB-V(C)	12-24VDC	12-24VDC	1A	12-24W
ED-V(C)	12-24VDC	12-24VDC	1A	12-24W

► Laser Sensing Switch

- Constant voltage output, connect with low voltage LED strip
- Detection distance: 0.05-2.5m
- Detection angle: 20°
- Five delay off times can be set (5, 10, 30, 60, 180s).
- Suitable for lighting staircases, courtyards, aisles, corners, corridors, etc
- Set the sensing detection distance by powering up or pressing the key.



EL-V



EL-V(L)

Model No.	Input Voltage	Output Voltage	Output Current	Output Power
EL-V	12-24VDC	12-24VDC	1.5A	18-36W
EL-V(L)	12-24VDC	12-24VDC	1.5A	18-36W

► Hand Sweep/Door Control Sensor Remote

- CR2450 battery
- Apply to cabinet, closet, wine cabinet and other lighting



EF-B



Hand sweep mode (dimmable) /
Hand sweep mode (non-dimmable)



Door control mode

Model No.	Output signal	Control distance	Sensing range	Work voltage	Size (mm)
EF-B	RF(2.4GHz)	10cm	3-4cm	3VDC(CR2450)	52 X 42 X 12

► Paste Anywhere Sensor Switch head

- Detection distance: 0.5-5m, detection angle: 120°
- Built-in 5.8GHz motion-detecting radar module detects human movement through wood, plastic, acrylic or thin non-metallic materials.
- When detected human movement, the light will turn on; when human movement is not detected, the light will turn off after the delay is over.
- 5 levels of delayed light off time can be set(10s, 30s, 60s, 180s, 300s).
- 4 levels of sensor distance can be set (5m, 3m, 1.5m, 0.5m).



Human motion Sensor

E1-M



Touch Sensor

E1-T



Hand Sweep Sensor


E1-W

- Can detect touch movement through non-metallic materials such as wood, crylic, plastic and glass.
- Short press to turn on/off the light, long press to adjust the brightness.
- 2 levels of touch sensing distance can be set (0-1cm for open installation, 3-4cm for concealed installation).
- PWM:500/2KHZ/4KHZ

- Detection distance ≤ 5cm
- Can detect hand waving motions through non-metallic materials such as wood, acrylic, plastic and glass.
- Hand sweep once the light fade on, sweep again the light fade off.
- Hand stay moment can be set dimmable or non-dimmable.
- PWM:500/2KHZ/4KHZ



Open installation:

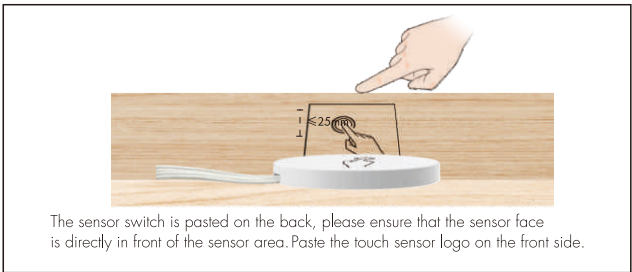

Concealed installation:

► Paste Anywhere Sensor Switch

- Built-in 5.8GHz motion-detecting radar module detects human movement through wood, plastic, acrylic or thin non-metallic materials.
- When detected human movement, the light will turn on; when human movement is not detected, the light will turn off after the delay is over.
- 5 levels of delayed light off time can be set (10s, 30s, 60s, 180s, 300s).
- 4 levels of sensor distance can be set (5m, 3m, 1.5m, 0.5m)



Human motion Sensor Switch

DC female jack in
DC male jack out

E1-M(D)



Human motion Sensor Switch

Dupont male jack in
Dupont female jack out

E1-M(L)

- Can detect touch movement through non-metallic materials such as wood, acrylic, plastic and glass.
- Short press to turn on/off the light, long press to adjust the brightness.
- 2 levels of touch sensing distance can be set (0-1cm for open installation, 3-4cm for concealed installation).
- PWM:500/2KHZ/4KHZ



Touch Sensor Switch

DC female jack in
DC male jack out

E1-T(D)



Touch Sensor Switch

Dupont male jack in
Dupont female jack out

E1-T(L)

- Can detect hand waving motions through non-metallic materials such as wood, acrylic, plastic and glass.
- Hand sweep once the light fade on, sweep again the light fade off.
- Hand stay moment can be set dimmable or non-dimmable.
- PWM:500/2KHZ/4KHZ



Hand Sweep Sensor Switch

DC female jack in
DC male jack out

E1-W(D)



Hand Sweep Sensor Switch

Dupont male jack in
Dupont female jack out

E1-W(L)

Model No.	Input Voltage	Output Voltage	Output Current	Output Power	Detection distance	Detection angle
E1-M(D)	5-24VDC	5-24VDC	3A	15-72W	0.5-5m	120°
E1-M(L)	5-24VDC	5-24VDC	3A	15-72W	0.5-5m	120°
E1-T(D)	5-24VDC	5-24VDC	3A	15-72W	/	/
E1-M(D)	5-24VDC	5-24VDC	3A	15-72W	/	/
E1-M(L)	5-24VDC	5-24VDC	3A	15-72W	≤ 5cm	/
E1-T(D)	5-24VDC	5-24VDC	3A	15-72W	≤ 5cm	/