



Mechanical Structures and Installations

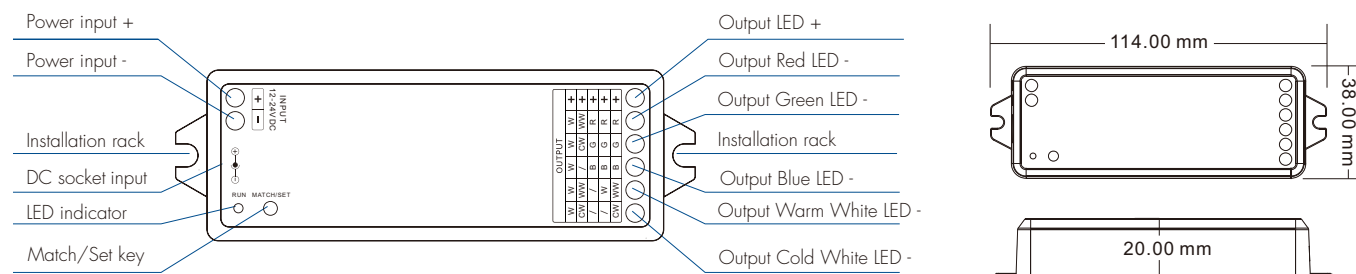


Wiring Diagram

• For RGB+CCT

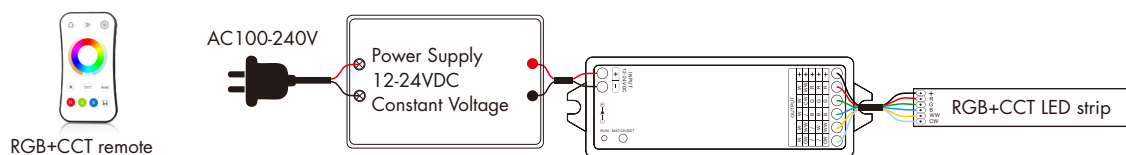


Press and hold match/set key for 16s, until the RUN LED indicator turn blue, then release, the controller will become RGB+CCT type, then do smart config by Tuya smart APP, or short press match key to match with RGB+CCT RF remote.

• For RGBW

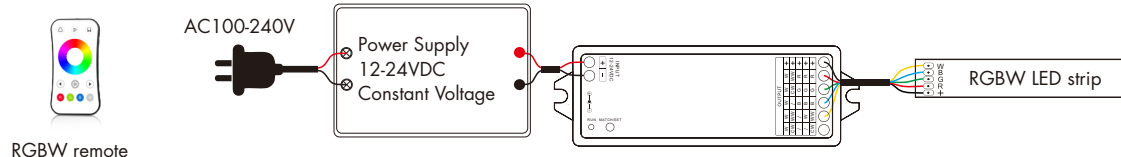


Press and hold match/set key for 14s, until the RUN LED indicator turn green, then release, the controller will become RGBW type, then do smart config by Tuya smart APP, or short press match key to match with RGBW RF remote.

• For RGB

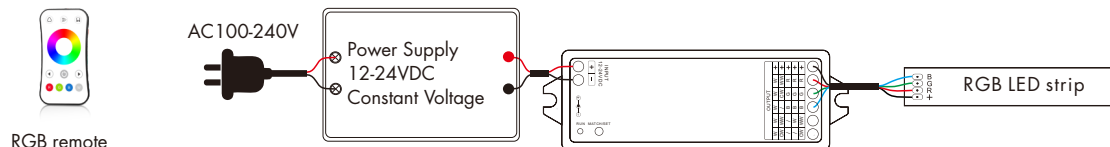


Press and hold match/set key for 12s, until the RUN LED indicator turn red, then release, the controller will become RGB type, then do smart config by Tuya smart APP, or short press match key to match with RGB RF remote.

• For dual color CCT

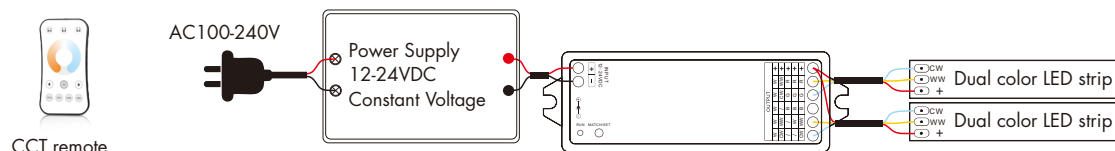

Press and hold match/set key for 10s, until the RUN LED indicator turn yellow, then release, the controller will become CCT type, then do smart config by tuya APP, or short press match key to match with CCT RF remote.

• For single color

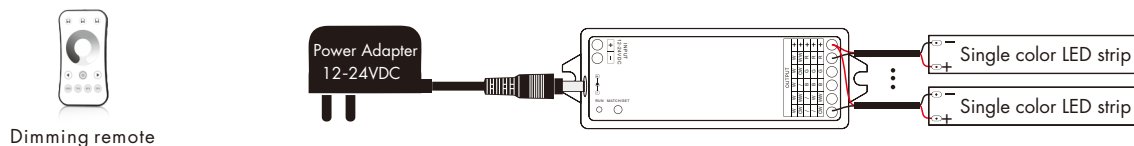

Press and hold match/set key for 8s, until the RUN LED indicator turn white, then release, the controller will become DIM type, then do smart config by Tuya smart APP, or short press match key to match with dimming RF remote.

Note:

1. User can connect constant voltage power supply or power adapter as power input.
2. Press and hold Match/Set key for 2s, switch 5 kinds light type in sequence.
3. For RGB+CCT or CCT light type, continuous power on and off will change 3 levels color temperature (WW, NW and CW) in sequence.
4. Switch off the power, then switch on power, repeat again.
Immediately short press match key 3 times, the light on/off time will change between 3s and 0.5s.

Tuya Smart APP Network Connection


Press and hold Match/Set key for 2s:
Switch 5 kinds light type in sequence, notice this operation does not automatically clear previous network connection.

Press and hold Match/Set key for 5s, or push twice Match/Set key fastly, or when press and hold Match/Set key for 8-10s to set 5 kinds light type:
Clear previous network connection, enter config mode, the purple LED indicator fast flash, the output LED will flash 10 times.

Repeat power on and off for 5 consecutive times, also clear previous network connection, enter config mode, the output LED will flash 10 times.

If Tuya smart APP network connection succeed, the RUN LED indicator will stop flash purple, and turn corresponding light type color (White: DIM, Yellow: CCT, Red: RGB, Green: RGBW, Blue: RGB+CCT).
and in Tuya smart APP, you can find BT-RGB+CCT device (or other DIM, CCT, RGB or RGBW).

Tuya Smart APP Interface

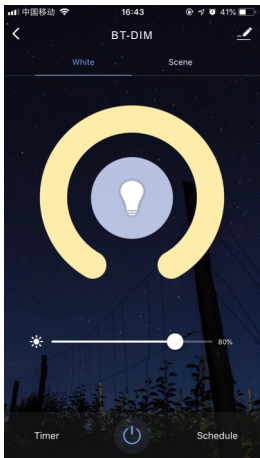


White interface

For DIM type:
Touch brightness slide to adjust brightness.

For RGB type:
Touch brightness slide,
get RGB mixed white firstly,
then to adjust white brightness.


For RGBW type:
Touch brightness slide,
adjust white channel brightness.

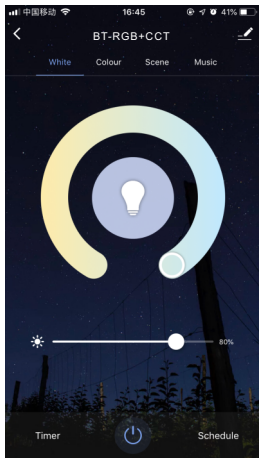

Color temperature interface

For CCT type:
Touch color wheel to adjust color temperature.
Touch brightness slide to adjust brightness.


For RGB+CCT type:
Touch color wheel to adjust color temperature,
RGB will turn off automatically.
Touch brightness slide to adjust white brightness.

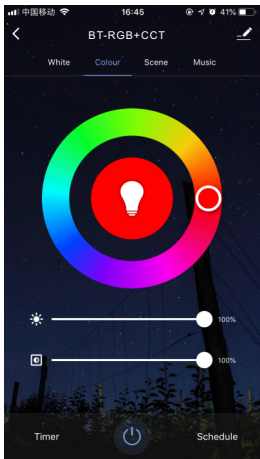

Colour interface

For RGB or RGBW type:
Touch color wheel to adjust static RGB color.
Touch brightness slide to adjust color brightness.
Touch saturation slide to adjust color saturation,
namely gradient from the current color to white(RGB mixed).


For RGB+CCT type:
Touch color wheel to adjust static RGB color, WW/CW will turn off automatically.
Touch brightness slide to adjust color brightness.
Touch saturation slide to adjust color saturation,
namely gradient from the current color to white (RGB mixed).

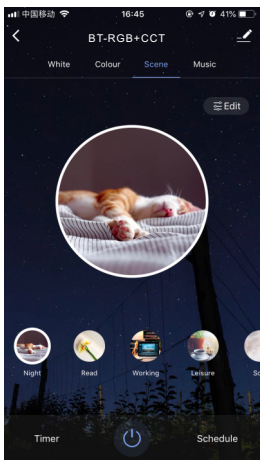

Scene interface

The 1-4 scene is static color for all light type.
the inner color of these scene can be editable.

The 5-8 scene is dynamic mode for RGB,
RGBW, RGB+CCT type, such as green fade
in and fade out, RGB jump, 6 color jump,
6 color smooth.

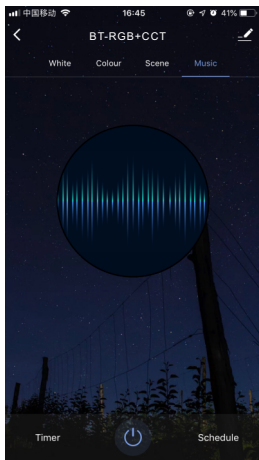

Music, Timer, Schedule

The music play can use smart phone music player
or micro-phone as music signal input.

The Timer key can turn on or turn off light in the
next 24 hours.

The Schedule key can add multiple timers to turn
on or turn off light according to different time
periods.

WB5 Match Remote Control (Optional)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the controller’s Match key

Match:
Short press match key of WB5,
immediately press on/off key (single zone remote)
or zone key (multiple zone remote) on the remote.
The LED indicator fast flash a few times means match is successful.

Delete:
Press and hold match key of WB5 for 20s,
The LED indicator fast flash a few times means all matched remotes
were deleted.

Use Power Restart

Match:
Switch off the power of WB5, then switch on power, repeat again.
Immediately short press on/off key (single zone remote)
or zone key (multiple zone remote) 3 times on the remote.
The light blinks 3 times means match is successful.

Delete:
Switch off the power of WB5, then switch on power, repeat again.
Immediately short press on/off key (single zone remote)
or zone key (multiple zone remote) 5 times on the remote.
The light blinks 5 times means all matched remotes were deleted.

WB5 Work as Bluetooth-RF Converter to Match RF LED Controller or Dimming Driver

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the controller’s Match key

Match:
Short press match key of the controller,
immediately press on/off key on the Tuya smart APP.
The LED indicator fast flash a few times means match is successful.

Delete:
Press and hold match key of the controller for 5s,
The LED indicator fast flash a few times means match was deleted.

Use Power Restart

Match:
Switch off the power of the controller, then switch on power, repeat again.
Immediately short press on/off key 3 times on the Tuya smart APP.
The light blinks 3 times means match is successful.

Delete:
Switch off the power of the controller, then switch on power, repeat again.
Immediately short press on/off key 5 times on the Tuya smart APP.
The light blinks 5 times means match was deleted.

RGB Dynamic Mode List

For RGB/RGBW:

No.	Name	No.	Name
1	RGB jump	6	RGB fade in and out
2	RGB smooth	7	Red fade in and out
3	6 color jump	8	Green fade in and out
4	6 color smooth	9	Blue fade in and out
5	Yellow cyan purple smooth	10	White fade in and out

For RGB+CCT:

No.	Name	No.	Name
1	RGB jump	6	RGB fade in and out
2	RGB smooth	7	Red fade in and out
3	6 color jump	8	Green fade in and out
4	6 color smooth	9	Blue fade in and out
5	Color temperature smooth	10	White fade in and out