


TR1

AC Triac RF + Push Dimmer

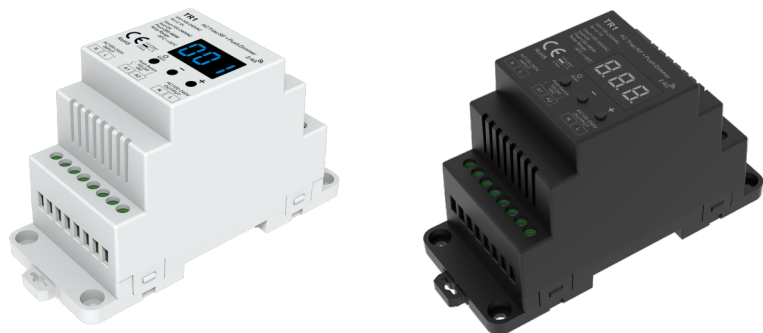

CE RoHS

Features


- RF + Push AC phase-cut dimmer, 1 channel output.
- To dim and switch single color dimmable LED lamps, traditional incandescent and halogen lights.
- Digital numeric display, set brightness by buttons.
- 0-100% dimming smoothly without any flash.
- Reverse-phase dimming or forward-phase dimming selectable.
- Minimum brightness set from 1% to 40%.
- Light on/off fade time 0 - 20s selectable.
- Compatibility with RF 2.4G single zone or multiple zone dimming remote control.
- Connect with external push switch to achieve on/off and 0-100% dimming function.
- Over-heat protection, recover automatically.
- Available in white or black.

Technical Parameters

Input and Output		Dimming Data	Safety and EMC	
Input voltage	100-240VAC	Input signal 3 Buttons + RF 2.4G + AC Push	EMC standard	EN IEC 55015/ EN IEC 61547 ETSI EN 301 489-1/-3
Output voltage	100-240VAC	Dimming level 100 levels	Safety standard	EN 61347-1/-2
Output current	1CH, 2A	Dimming range 0-100%	Radio equipment	ETSI EN 300 440
Output power	200-480W	Environment		Certification CE RoHS
Package		Operation temperature Ta: -30°C ~ +55°C	Warranty	
Size	L120 x W78 x H55mm	Case temperature (Max.) Tc: 85°C	Warranty 5 years	
Gross weight	0.17kg	IP rating IP20		

Triac

Mechanical Structures and Installations

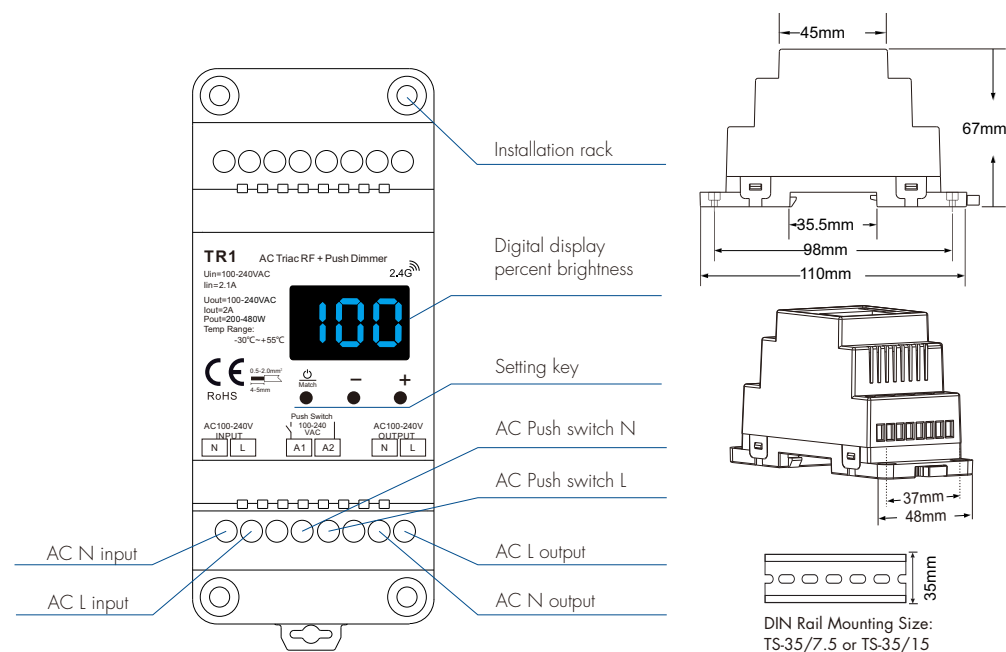

Compatible Load Types


Load Type	Maximum Load	Remarks
Dimmable LED lamps	300W @ 220V 150W @ 110V	Due to variety of LED lamp designs, maximum number of LED lamps is further dependent on power factor result when connected to dimmer.
Triac Dimmable LED drivers	300W @ 220V 150W @ 110V	Maximum permitted number of drivers is 300W divided by driver rated input power, and make sure the surge current is no more than 2 times 65A.
Incandescent lighting, HV Halogen lamps	500W @ 220V 250W @ 110V	

Wiring Diagram




Caution: Please carefully ensure all wire connections and polarities are correct and secure before applying power, otherwise this controller will be damaged.

- Connect with dimmable LED light

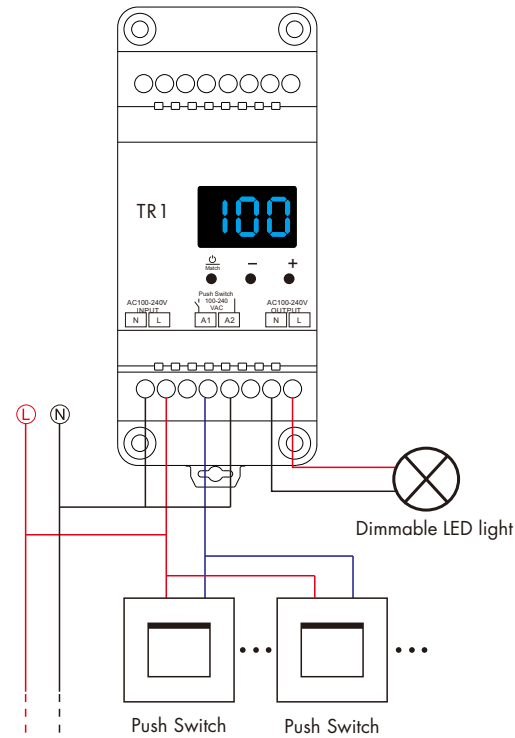


- Connect with Triac dimmable LED driver

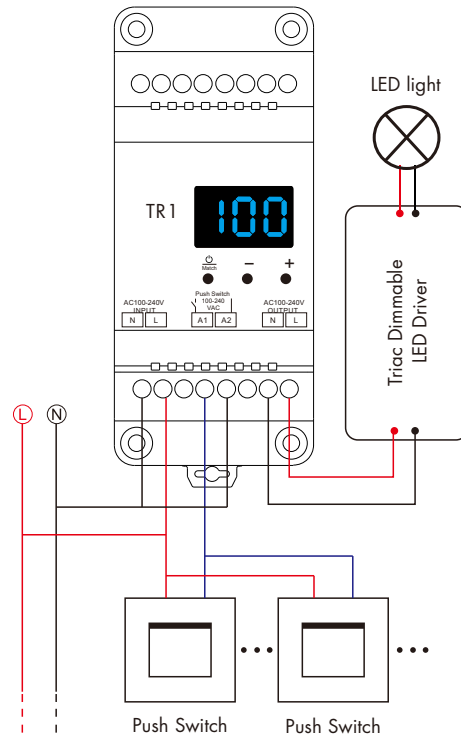


System Parameter Setting

- Long press and - key for 2s, prepare for setup system parameter: control method, minimum brightness curve, light on/off fade time, automatic blank screen. short press key to switch four item.
- Control method: short press - or + key to switch forward-phase("C-F") or reverse-phase("C-R").

Forward-phase control dimmer



Reverse-phase control dimmer



- Minimum brightness: short press - or + key to set minimum brightness, from 1% to 40%("b01" to "b40"). You need set suitable minimum brightness to avoid flick.
- Light on/off fade time: short press - or + key to switch 0.5s("d00"), 2s("d02"), 3s("d03"), 5s("d05"), 10s("d10") or 20s("d20") fade on/off time.
- Automatic blank screen: short press - or + key to switch enable("bon") or disable("boF") automatic blank screen.
- Long press M key for 2s or timeout 10s, quit system parameter setting.

Restore Factory Default Parameter

- Long press - and + key for 2s, restore factory default parameter, display "RES".
- Factory default parameter: 100% brightness, reverse-phase control, 5% minimum brightness, 0.5s fade on/off time, disable automatic blank screen.

Dimming by 3 Buttons

- Short press key, turn on or turn off light.
When display percent brightness value (001~100), the light is on.
When display "bon", the light is off.
- When light is on, Press - or + key to change brightness, long press for continuous adjustment.

Dimming by Push Switch

The provided AC Push-Dim interface allows for a simple dimming method using commercially available non-latching (momentary) wall switches.

- **Short press:**
Turn on or off light.
- **Long press (1-6s):**
Press and hold to stepless dimming,
With every other long press, the light level goes to the opposite direction.
- **Dimming memory:**
Light returns to the previous dimming level when switched off and on again, even at power failure.
- **Synchronization:**
If more than one dimmer are connected to the same push switch, do a long press for more than 10s, then the system is synchronized and all lights in the group dim up to 100%.
This means there is no need for any additional synchrony wire in larger installations.
We recommend the number of dimmers connected to a push switch does not exceed 25 pieces,
The maximum length of the wires from push to dimmer should be no more than 20 meters.

Dimming by RF Remote

Match Remote Control (two match ways)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the Match key

Match:

Long press Match key for 2s, display "RLS", within 5s, press on/off key (single zone remote) or zone key (multiple zone remote) of the remote, display "RLO", match is successful.

Delete:

Long press Match key for 5s, until display "RLE", delete all matched remote.

Use Power Restart

Match:

Switch off the power, then switch on power, repeat again.
Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote.
The light blinks 3 times means match is successful.

Delete:

Switch off the power, then switch on power, repeat again.
Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote.
The light blinks 5 times means all matched remotes were deleted.