

T20, T20-1, T20-2, T20-3 Wall Mounted Touch Panel



T20-1
1 Zone switch



T20-2
2 Zone switch



T20-3
3 Zone switch



T20
4 Zone switch


CE RoHS UKCA

Features


- Touch panel 1/2/3/4 zone dimming switch RF remote.
- Each zone can remote control multiple RF 2.4G LED controllers.
- Ultra sensitive high strength glass touch panel.
- Touch keys with chord tones and LED indicator.
- Free installation, no wiring, removable.
- AAA x 2 battery powered.
- White & Black glass panel available.

Technical Parameters


Input and Output		Environment		Safety and EMC	
Output signal	RF(2.4GHz)	Operation temperature	Ta: -30°C ~ +55°C	EMC standard	EN IEC 55015/ EN IEC 61547 ETSI EN 301 489-1/-17
Working voltage	3VDC(AAA x 2)	Case temperature (Max.)	Tc: +65°C	Safety standard	EN 61347-1/-2
Working current	<5mA(Without tune) <20mA(with tune)	IP rating	IP20	Radio equipment	ETSI EN 300 440
Standby current	<20μA	Package		Certification	CE RoHS UKCA
Standby time	1 year	Size	L100xW88xH30mm	Warranty	
Remote distance	30m (Barrier-free space)	Gross weight	0.19kg	Warranty	5 years

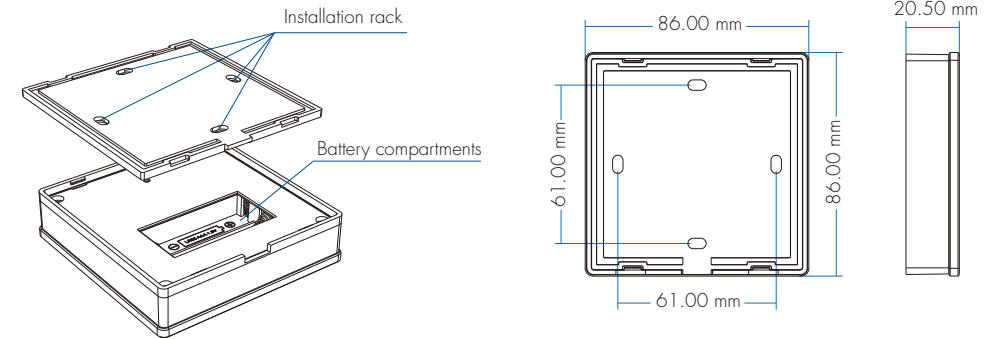

Installation diagram:

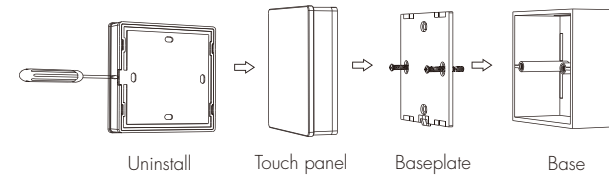

Typical base as below:



To fix the panel, two options are offered for selection:

- Option 1: fix it on the wall with two screws.
Option 2: adhere it to the wall with paster.

Touch Panel Work as RF Remote (two match ways)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the controller's Match key

Match:

Short press match key,
immediately press ON key of the touch panel.
The LED indicator fast flash a few times
means match is successful.

Delete:

Press and hold match key for 5s to delete all match.
The LED indicator fast flash a few times
means all matched remotes were deleted.

Use Power Restart


Match:

Switch off the power of the receiver,
then switch on power, repeat again.
Immediately short press ON key 3 times on the touch panel.
The light blinks 3 times means match is successful.

Delete:

Switch off the power of the receiver,
then switch on power, repeat again.
Immediately short press ON key 5 times on the touch panel.
The light blinks 5 times means all matched remotes were deleted.

Key Function

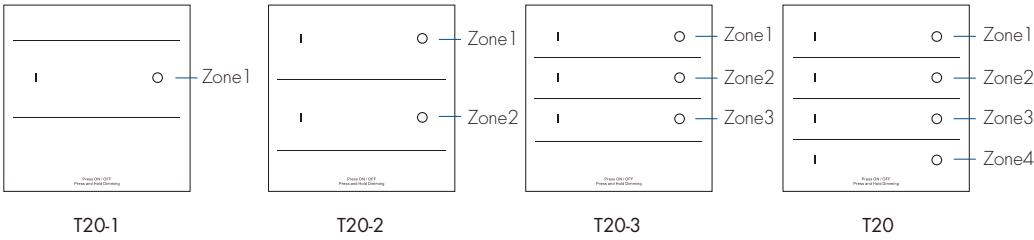

— ON key
Short press: Turn on the light of each zone.
Long press(1-6s): Dimming up when light is on.

— OFF key
Short press: Turn off the light of each zone.
Long press(1-6s): Dimming down when light is on.
Long press(5s) : Turn on or turn off tone when light is off.

Safety Information

1. Read all instructions carefully before you begin this installation.
2. When installing battery, pay attention to the battery positive and negative polarity.
A long time without the remote control, remove the battery.
When remote distance becomes smaller and insensitive, replace the battery.
3. If no response from the receiver, please re-match the remote.
4. Gently handle remote, beware of falling.
5. For indoor and dry location use only.