

RGBW/RGB/CCT/Dimming 4 Channel LED RF Controller

Model No.: V4-S

4 Channels/Push Dim/Wireless remote control/Auto-transmitting/Synchronize/Wall junction box mounting

Features

- RF + Push LED controller, 4 channel constant voltage output.
- Set as single color, dual color, RGB or RGBW controller by DIP switch.
- Match with Skydance's 2.4G single color, dual color and RGB/RGBW remote control.
- One RF controller accept up to 10 remote control.
- 4096 levels 0-100% dimming smoothly without any flash.
- When using with RGB/RGBW light, built in 10 dynamic mode, include jump or gradual change style.
- Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance.
- Synchronize on multiple number of controllers.
- Connect with external push switch to achieve on/off and 0-100% dimming function.
- Easy to be placed in standard wall junction box behind a push switch.




FC CE RoHS LVD RED


Technical Parameters

Input and Output		Safety and EMC	
Input voltage	12-24VDC	EMC standard (EMC)	EN301 489, EN 62479
Input current	12.5A	Safety standard(LVD)	EN60950
Output voltage	4 x (12-24)VDC	Radio Equipment(RED)	EN300 328
Output current	4CH, 3A/CH	Certification	CE, EMC, LVD, RED
Output power	4 x (36-72)W	Environment	
Output type	Constant voltage	Operation temperature	Ta: -30 °C ~ +55 °C
Dimming data		Case temperature (Max.)	Tc: +85 °C
Input signal	RF 2.4GHz + Push Dim	IP rating	IP20
Control distance	30m(Barrier-free space)	Warranty and Protection	
Dimming gray scale	4096 [2^12] levels	Warranty	5 years
Dimming range	0-100%	Protection	Reverse Polarity
Dimming curve	Logarithmic		

Mechanical Structures and Installations

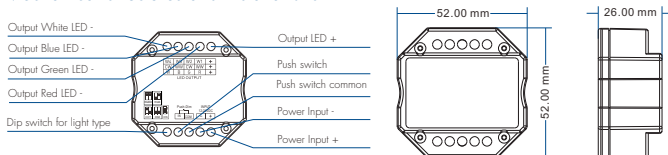


Typical Wall Junction Box Mounting

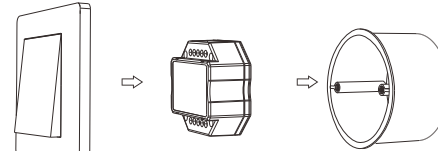



Wiring Diagram

• For RGBW

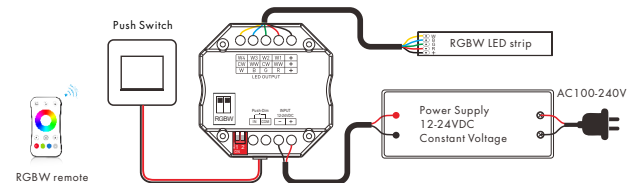

• For RGB

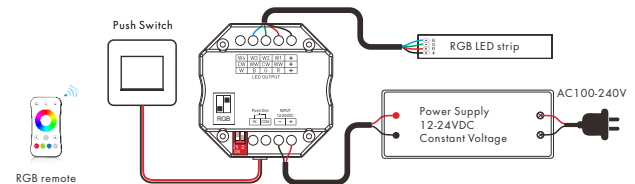

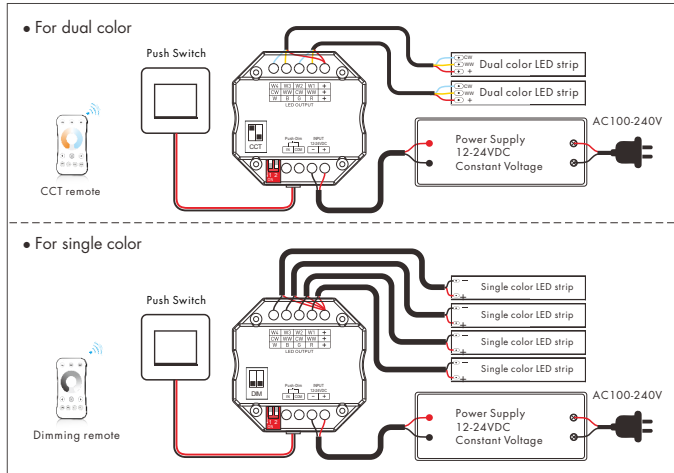

Push Dim

Single color	Click	ON/OFF
	Double Click	Turn on at 100% or 10%(night light) and vice-versa
	Long press(>1s) from OFF	Dimming UP/DOWN
	Long press(>1s) from ON	Dimming UP/DOWN
Dual Color	Click	ON/OFF
	Double Click	Turn on at 100% or 10%(night light) and vice-versa
	Long press(>1s) from OFF	Color temperature UP/DOWN (turn off and turn on to return dimming)
	Long press(>1s) from ON	Dimming UP/DOWN
RGB	Click	ON/OFF
	Double Click	Change from color mode to white mode (RGB mixed) and vice-versa
	Long press(>1s) from OFF	If on color mode change rotation speed; If on white mode dimming UP/DOWN
	Long press(>1s) from ON	If on color mode start/stop color rotation; If on white mode dimming UP/DOWN
RGBW	Click	ON/OFF
	Double Click	Change between color mode, white mode(W channel) and color+W mode
	Long press(>1s) from OFF	If on color mode change rotation speed; If on white mode or color+W mode, WV dimming UP/DOWN
	Long press(>1s) from ON	If on color mode start/stop color rotation; If on white mode or color+W mode, WV dimming UP/DOWN

Color rotation:



We can select 4 rotation speed:

10 flash/s means 6 seconds color rotation, 5 flash/s means 30 seconds color rotation,
2 flash/s means 1 minute color rotation, 1 flash/s means 6 minutes color rotation.

Match Remote Control (two match ways)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the controller's DIP switch

Match:

Change DIP switch setting, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) of the remote.

Use Power Restart

Match:

Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote. The light blinks 3 times means match is successful.

Delete:

Switch off the power, then switch on power again, immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote. The light blinks 5 times means all matched remotes were deleted.

RGB/RGBW dynamic mode list

No.	Name	No.	Name
1	RGB jump	6	RGB fade in and out
2	RGB smooth	7	Red fade in and out
3	6 color jump	8	Green fade in and out
4	6 color smooth	9	Blue fade in and out
5	Yellow cyan purple smooth	10	White fade in and out

Dual color control


CH1, CH3=Warm white LED

CH2, CH4=Cool white LED


Each channel can supply up to 16W(@24V) and white balance can be controlled as such:

Color temperature	Cool white	Neutral white	Warm white
Power distribution	CH1=0W, CH2=72W CH3=0W, CH4=72W	CH1=36W, CH2=36W CH3=36W, CH4=36W	CH1=72W, CH2=0W CH3=72W, CH4=0W

Linear dual color tuning



Dimming curve for CCT



Dimming curve for RGBW/RGB/DIM

