


RF + Push Single Color LED Mini Controller

- 1 channel constant voltage single color LED mini RF controller.
- 3A per channel, output connect with 5 meters single color LED strip, max output power 75W.
- Connect with push switch to achieve on/off and 0-100% dimming function.
- Match with RF 2.4G single zone or multiple zone dimming remote control optionally.
- One RF controller accept up to 10 remote control.
- 4096 levels 0-100% dimming smoothly without any flash.
- Auto-transmitting function: Controller automatically transmit signal to another controller with 30m control distance.
- Synchronize on multiple number of controllers.

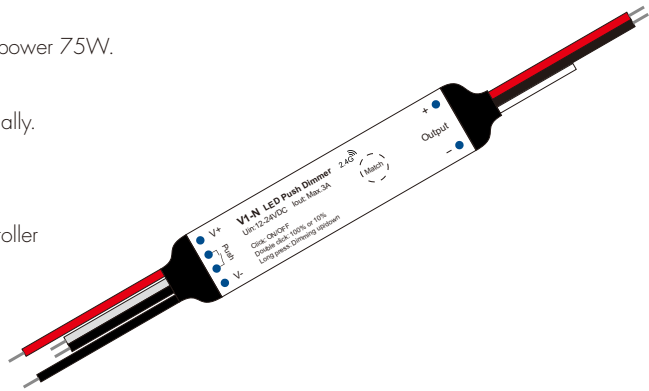

CE RoHS RED


Technical Parameters

Input and Output		Dimming data		Safety and EMC	
Input voltage	12-24VDC	Input signal	RF 2.4GHz + Push Dim	EMC standard	EN 62479:2010 ETSI EN 301 489-1 V2.2.3 ETSI EN 301 489-17 V3.2.4
Output voltage	12-24VDC	Control distance	30m(Barrier-free space)	Safety standard	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017
Output power	Max. 75W	Dimming gray scale	4096 (2^12) levels	Radio Equipment	ETSI EN 300 328 V2.2.2
Output type	Constant voltage	Dimming range	0-100%	Certification	CE RED
Environment		Dimming curve	Logarithmic	Package	
Operation temperature	Ta: -30℃ ~ +55℃	PWM frequency	500Hz (default)	Size	190 x H130mm
Case temperature (Max.)	Tc: +85℃	Warranty		Gross weight	0.013kg
IP rating	IP20	Warranty	5 years		

Dimension



Wiring Diagram

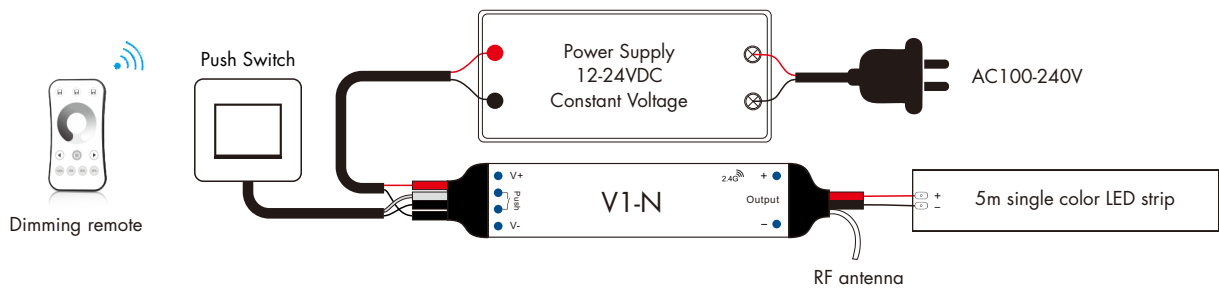

Push Dim function:

Click	ON/OFF
Double Click	Turn on at 100% or 10% (night light) and vice-versa
Long press(> 1s) from OFF	Dimming UP/DOWN
Long press(> 1s) from ON	Dimming UP/DOWN

Match Remote Control (two match ways)

End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the controller’s Match key

Match:
Short press match key, immediately press on/off key (single zone remote) or zone key (multiple zone remote) on the remote.
The light blinks 3 times means match is successful.


Delete:
Press and hold match key for 5s to delete all match,
The light blinks 5 times means all matched remotes were deleted.

Use Power Restart

Match:
Switch off the power of the receiver, then switch on power.
Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote.
The light blinks 3 times means match is successful.

Delete:
Switch off the power of the receiver, then switch on power.
Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote.
The light blinks 5 times means all matched remotes were deleted.

Dimming Curve

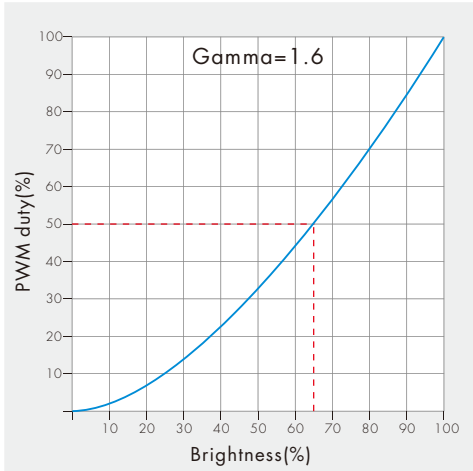

Malfunctions Analysis & Troubleshooting

Malfunctions	Causes	Troubleshooting
No light	1. No power. 2. Wrong connection or insecure.	1. Check the power. 2. Check the connection.
No response from the remote	1. The battery has no power. 2. Beyond controllable distance. 3. The controller did not match the remote.	1. Replace battery. 2. Reduce remote distance. 3. Re-match the remote.

Installation Precautions

- 1. The products shall not be stacked, the distance should be ≥ 20cm, so as not to affect lifespan of the products due to poor heat dissipation.
- 2. The product shall not be installed close to the switching power supply with an interval of ≥ 20cm to avoid the radiation interference of the switching power supply.
- 3. The installation height shall be ≥ 1m from the floor to avoid shortening the remote control distance due to too weak reception signal.
- 4. The products are not allowed to be close to or covered by metal objects, with an interval of ≥ 20cm to avoid signal attenuation and shorten the remote control distance.
- 5. Avoid installation at the corner of the wall or the corner of the beam, with an interval of ≥ 20cm to avoid signal interference.